


BETON MASTER PUMP FOR CONCRETE & SHOTCRETE

- Shotcrete or pumping mode.
- Regulated output from 2-15 m³ per hour.
- Steel pipes or rubber hoses depending upon granulometry.
- Max. pressure: 70 bar on the material.
- Prime mover: Diesel engine / 3 phase electric motor.
- Max. pumpable granulometry : 20 to 25 mm.
- Pumping cylinder: 120 mm dia, stroke 700 mm.

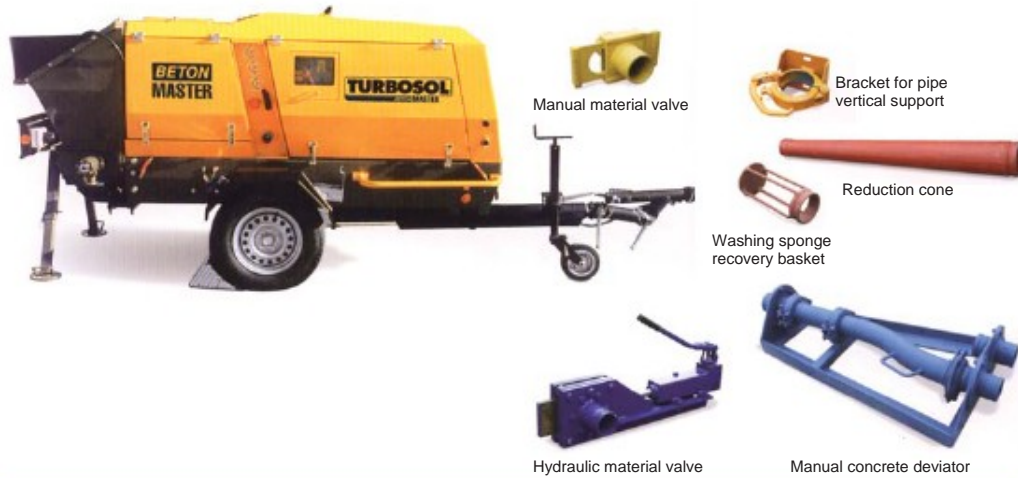

T5/T7 THIN LAYER COATING INJECTION PRESSURE GROUTING

- Suitable for thin layer coatings, textures, soundproofing and fire insulating plaster and pressure pointing with cementitious slurries.
- Prime mover : 1 phase electric
- Compressor: 220 Ltrs/min (optional)
- Max. pressure: T-5 25 bar
T-7 35 bar
- Granulometry: T-5 up to 2 mm
T-7 up to 5 mm
- Hopper capacity : 50 Lit.
- Weight : 70 Kg.

